



# NK COUPLING

ขนาด	B โตรอบแกน (LENGTH)	A โตรอบนอก (O.D.)	MAX C ขนาดรู (KW)	D ความสูง	HP
45	30	45	15	54	-
55	39	55	-	69	0.5
65	39	65	-	74	0.5-1
80	53.5	80	10-25	91	1-3
95	75	95	10-35	107	5-7 <sup>1/2</sup>
115	92	115	12-45	148	10-15
135	105	135	12-55	155	15-30
160	116	160	16-70	169	20-40
180	120	180	18-80	200	40-60
200	125	200	19-95	213	50-80

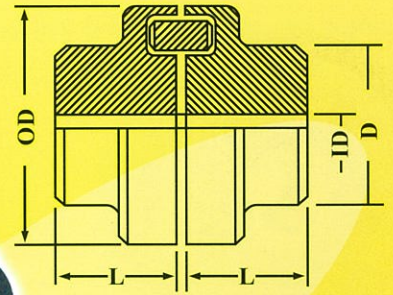

# Universal joints

Single

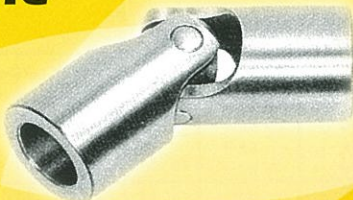


double




Size		Length			Keyway Din 6885			square	shape EB		weight kg/piece
D1	D2	L1	L2	L4	B	T	S	D	L		
H7		-1	±1	±0.5	P9	0.2		h7	-1	»	
6	10	14	40	20	-	-	-	-	-	0,014	
8	13	13	42	21	2	9,0	6	10	12	0,024	
10	16	17	52	26	3	11,4	8	13	15	0,047	
12	20	20	62	31	4	13,8	10	16	18	0,089	
16	25	23	74	37	5	18,3	14	20	22	0,160	
20	32	25	86	43	6	22,8	19	25	25	0,310	
25	40	32	10	54	8	28,3	24	32	32	0,625	
32	50	41	132	66	10	35,3	30	40	40	1,200	
40	63	47	166	83	12	43,3	36	50	50	2,400	


Size		Length			Keyway Din 6885			square	shape EB		weight kg/piece
D1	D2	L1	L2	L4	B	T	S	D	L		
H7		-1	±1	±0.5	P9	0.2		h7	-1	»	
8	13	13	60	21	2	9,0	6	10	12	0,035	
10	16	17	74	26	3	11,4	8	13	15	0,068	
12	20	20	88	31	4	13,8	10	16	18	0,130	
16	25	23	104	37	5	18,3	14	20	22	0,237	
20	32	25	124	43	6	22,8	19	25	25	0,463	
25	40	32	156	54	8	28,3	24	32	32	0,920	
32	50	41	188	66	10	35,3	30	40	40	1,800	
40	63	47	236	83	12	43,3	36	50	50	3,500	




standard version: round  
(shape E)

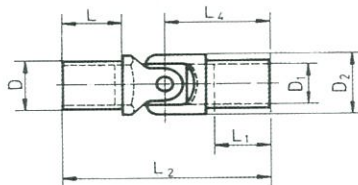


special version: round  
(shape EB)



square  
(V)



keyway  
(N)

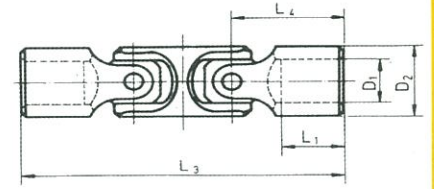

standard version: round  
(shape D)

